


SUPERNOVA

Thickness 1.5mm Roll Dimensions 6.5 feet*15Meters

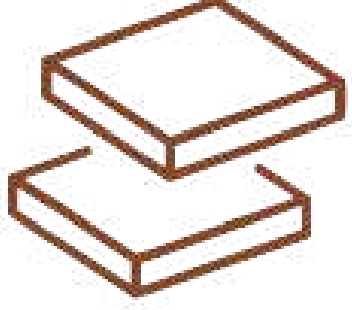


High Thickness
Performance

அதிக தடிப்பு
செயல்திறன்

ಹೆಚ್ಚಿನ ದಪ್ಪದ
ಕಾರ್ಯಕ್ಷಮತೆ

உயர்நகர்வு
ப്രவർത്തനം




Heavy-Use
Ready

கனரக
பயன்பாடு

ಭಾರಿ ಬಳಕೆಗೆ
ಸಿದ್ಧ

കുറിയ
ഉപയോഗം



Strong Powerback
Construction

வலுவான பவர்பு
கேக் கட்டமைப்பு

ಬಲವಾದ ಪವರ್‌ಬ್ಯಾಕ್
ನಿರ್ಮಾಣ

ശക്തമായ
പവർബാക്ക് ഘടന



Long-Term Value
Flooring

நீண்டகால மதிப்புள்ள
தரைமேற்பாடு

ದೀರ್ಘಕಾಲಿಕ ಮೌಲ್ಯದ
ಫ್ಲೋರಿಂಗ್

ദീർഘകാല മൂല്യമുള്ള
ഫ്ലോറിംഗ്

F

real color:



representative view:



image is just for representative purposes, color may vary.

F

real color:



representative view:



image is just for representative purposes, color may vary.

F

real color:



representative view:



image is just for representative purposes, color may vary.

F

real color:



representative view:



image is just for representative purposes, color may vary.

F

real color:



representative view:



image is just for representative purposes, color may vary.

F

real color:



representative view:



image is just for representative purposes, color may vary.

Supernova is our premium heavy-duty solution, built for those who demand superior comfort and longevity. With a substantial 1.5mm thickness, it delivers a cushioned feel underfoot and exceptional resistance to wear and tear. Designed for high-traffic homes and commercial spaces, Supernova combines luxury aesthetics with professional-grade durability.

PRODUCT SPECIFICATIONS

Characteristics	Roll Length	Roll Width	Sqft. Per Roll
SUPERNOVA	15 METERS	80 INCHES	322.92

Ensure a flawless flooring experience . Prioritize a 24-hour relaxation period for your PVC sheet in a room between 18°C and 27°C. Our vinyl rolls adapt to any surface, but ensure the sub-floor is even, hard, and dry. For installation, a clean, dry base is essential – use recommended adhesives like Fevicol SR 998 or SR 505.

F

FLOOREX

I N D I A